

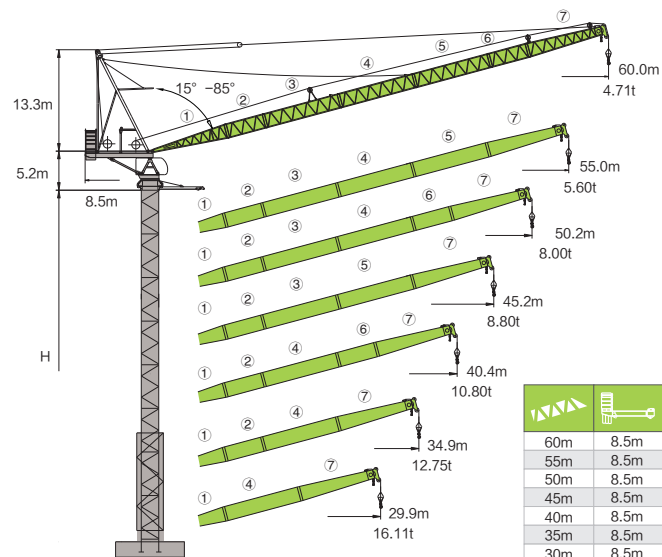


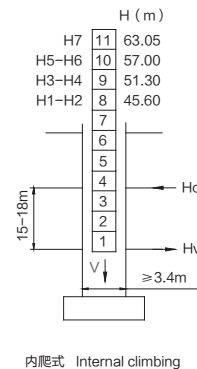

		H	(kg)	PHZ 10000A	PHZ 10000	PHZ 6000	PHZ 3000	PHZ 2000
60m	8.5m	H1	37000	1	1	2	1	1
55m	8.5m	H2	37000	1	1	2	1	1
50m	8.5m	H3	37000	1	1	2	1	1
45m	8.5m	H4	31000	1	1	1	1	1
40m	8.5m	H5	29000	1	1	1	1	0
35m	8.5m	H6	26000	1	1	1	0	0
30m	8.5m	H7	26000	1	1	1	0	0


■ 塔身 Masts / 反力 Reactions / L400-25

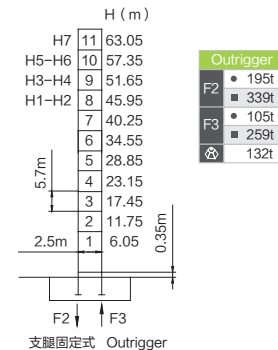


Internal climbing	
Ho	56-49t
Hv	64-53t
V	38-31t
	43-33t
	205t

- 工作状态反力 Reactions in service
 - 非工作状态反力 Reactions out of service
 - ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重和外爬升系统)
Weight with max free-standing height, max jib (without counter-weight, load and external climbing system)
- 请联系我们 Please consult us

■ 附着 Anchorages / L400-25

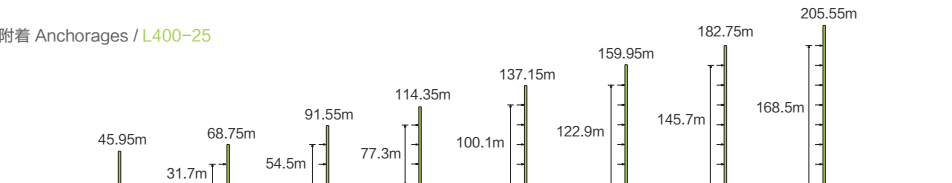

- 起重臂 Luffing jib

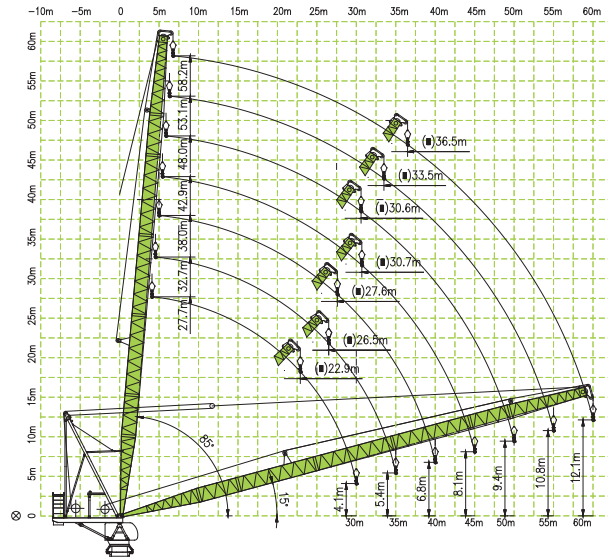

■ 非工作状态最小幅度 Minimum radius out of service
⊗ 臂根铰点 Hinge point at jib foot


■ 起重特性 Load diagram

		Max Capacity m/t	20	25	30	35	40	45	50	55	60
60	♂	6.8 ~ 24.3/12.50	12.50	12.41	10.45	8.87	7.62	6.59	5.87	5.30	4.71 4.60(59.6m)
	♀	6.5 ~ 21.0/14.00	14.00	12.30	10.23	8.65	7.40	6.38	5.68	5.14	
55	♂	6.3 ~ 27.7/12.50	12.5		11.48	9.48	8.10	7.03	6.21	5.60	5.51(54.5m)
	♀	6.1 ~ 21.2/16.00	16.00	13.81	11.24	9.26	7.84	6.85	6.05		
50	♂	5.9 ~ 31.4/12.50	12.5		12.50	11.10	9.61	8.50	8.00(50.2m)		7.94(49.7m)
	♀	5.6 ~ 14.3/25.00	19.22	15.48	12.88	10.89	9.44	8.35			
45	♂	5.4 ~ 32.6/12.50	12.50			11.67	10.00	8.80(45.2m)		8.76(44.7m)	
	♀	5.2 ~ 16.1/25.00	20.74	16.70	13.67	11.48	9.84				
40	♂	5.0 ~ 35.1/12.50	12.50			12.50	10.80(40.4m)		10.80(39.9m)		
	♀	4.7 ~ 20.2/25.00	25.00	19.41	15.31	12.42					
35	♂	4.5 ~ 35.4/12.50	12.50			12.50(35.4m)		12.75(34.9m)			
	♀	4.3 ~ 20.4/25.00	25.00	19.48	15.47						
30	♂	4.1 ~ 30.4/12.50	12.5		12.50(30.4m)		16.11(29.9m)				
	♀	3.8 ~ 20.5/25.00	25.00	19.76							


■ 传动机构 Mechanisms

配置 Configuration			⏏			⏏			kW	
			Ⅲ	Ⅳ	Ⅴ	Ⅲ	Ⅳ	Ⅴ		
 起升 Hoisting	H90FL-125-910	m/min	0~37.5	0~75	0~94	0~18.8	0~37.7	0~47	90	910m ①(6 layers)
		t	12.5	6.25	3	25	12.5	6		
	H132FL125-910D	m/min	0~53	0~106	0~132	0~26.5	0~53	0~66	132	910m ①(6 layers)
		t	12.5	6.25	3	25	12.5	6		
 回转 Slewing	HPW75F1.130A HPW75F2.130A	r/min	0~0.72						3×7.5 kW	①超出咨询我们 Consult us if overtop
 变幅 Trolleying	标配 L60FL80 Standard Configuration	min	3min(15° ~85°)						60	
	选配 BPL750B Optional		2.65min(15° ~85°)						75	
	380V(±10%) 50Hz		172.5 /229.5 (kw)							

■ 运输单元 Packing list / 上装 Upper Parts / L400-25

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty	序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	臂节Ⅰ JibⅠ		10.37	1.91	1.96	2.46	1	7	臂节Ⅶ JibⅦ		10.89	1.91	1.91	2.28	1
2	臂节Ⅱ JibⅡ		5.29	1.91	1.94	1.02	1	8	前上撑杆及头部滑轮组(A字架) Frontal-up Stay Bar and Pulley Block		9.92	2.17	0.90	2.85	1
3	臂节Ⅲ JibⅢ		10.26	1.91	2.14	2.02	1	9	前下撑杆B(A字架) Frontal-down Stay Bar		5.16	0.36	0.52	0.58	1
4	臂节Ⅳ JibⅣ		10.26	1.91	2.15	1.85	1	10	前下撑杆A(A字架) Frontal-down Stay Bar		5.16	0.34	0.52	0.57	1
5	臂节Ⅴ JibⅤ		10.26	1.91	2.13	1.79	1	11	缓冲器(A字架) Spring Buffer		4.60	2.05	0.29	0.52	1
6	臂节Ⅵ JibⅥ		5.29	1.91	2.07	0.96	1	12	斜撑杆(A字架) Diagonal stay		7.60	0.24	0.16	0.30	2

■ 运输单元 Packing list / 上装 Upper Parts / L400-25

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
13	后上撑杆 (A字架) Back-up Stay Bar		6.45	1.98	0.34	0.64	1
14	后下撑杆 (A字架) Back-down Stay Bar		6.45	1.96	0.39	0.73	1
15	回转塔身 Slewing Mast		2.28	2.18	2.09	1.77	1
16	司机室 Cabin		4.69	1.87	2.24	1.30	1
17	回转总成 Slewing Assembly		2.84	2.60	2.71	10.97	1
18	变幅机构 Luffing Mechanism		3.36	1.70	1.90	5.70	1
序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
19	起升机构 Hoisting Mechanism		4.10	2.70	1.80	8.91	1
20	变幅滑轮组 Luffing Pulley block		1.50	1.20	1.09	0.50	1
21	变幅拉杆A Luff rod A		5.10	0.22	0.15	0.63	14
22	变幅拉杆B Luff rod B		8.09	0.03	0.15	0.14	2
23	平衡臂结构 Counter jib Structure		9.05	2.18	1.31	5.61	1
24	平衡臂下撑杆 Counter jib down Stay Bar		4.40	1.96	0.39	0.95	1
25	吊钩组 Hook		2.07	0.26	0.75	0.50	1

■ 运输单元 Packing list / 下装 Bottom Parts / L400-25

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	爬升架主弦 Climbing Cage Main chord		11.58	0.51	0.56	1.40	4
2	引进梁 Leading beam		8.85	0.65	9.09	0.78	1
3	顶升挂板 Climbing Hanged beam		2.36	0.23	1.16	0.66	1
4	标准节主弦 Tower section Main chord		6.22	0.46	0.40	0.99	4/节 7*/台
5	上、中、下 内爬框 Internal Climbing frame		3.30	0.84	0.81	1.55	6
序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
6	内爬挂板横梁 Internal hanged beam		2.36	0.23	1.21	0.67	2
7	内爬基节 Internal Base Tower Section		6.00	2.50	2.53	9.54	1
8	内爬节 Internal Tower Section		6.00	2.50	2.53	6.50	4
9	外顶升泵站 external Climbing Pump		0.66	0.55	0.94	0.24	1
10	内爬升泵站 Internal Climbing Pump		0.66	0.55	0.94	0.24	1