

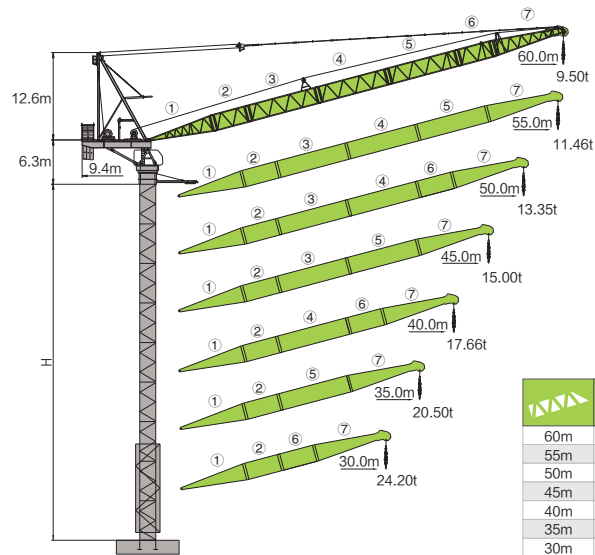




		H	(kg)	PHZA6000	PHZB6000	PHZ4000
60m	9.4m	H1	46000	3	2	4
55m	9.4m	H2	46000	3	2	4
50m	9.4m	H3	42000	3	2	3
45m	9.4m	H4	38000	3	2	2
40m	9.4m	H5	36000	3	1	3
35m	9.4m	H6	32000	3	1	2
30m	9.4m	H7	30000	3	2	0


■ 塔身 Masts / 反力 Reactions / L630-50




Internal climbing	
Ho	82~97t
Hv	49~63t
V	317t

- 工作状态反力 Reactions in service
 - 非工作状态反力 Reactions out of service
 - ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重和外爬升系统)
Weight with max free-standing height, max jib (without counter-weight, load and external climbing system)
- 请联系我们 Please consult us

■ 附着 Anchorages / L630-50

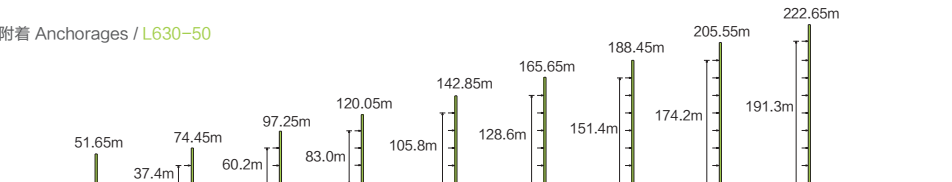

■ 起重臂 Luffing jib

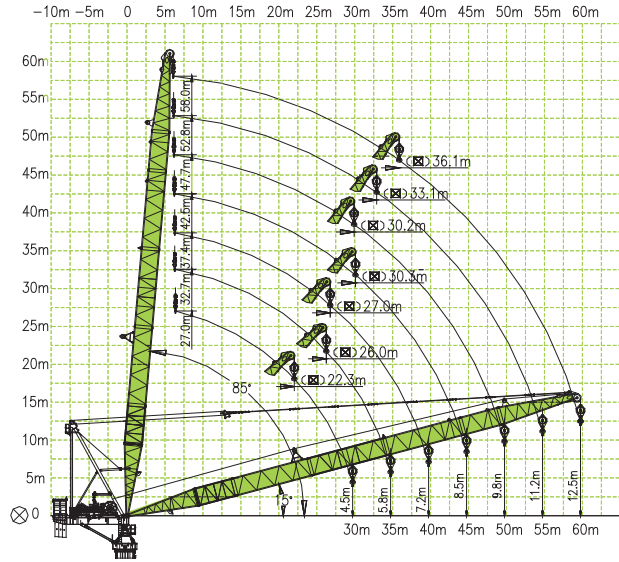

■ 非工作状态最小幅度 Minimum radius out of service
⊗ 臂根铰点 Hinge point at jib foot





■ 起重特性 Load diagram

		Max Capacity m/t	20	25	30	35	40	45	50	55	60
60		6.3~23.0/25.00	25.00	23.88	19.98	17.19	14.83	12.96	11.46	10.28	9.50
		6.3~10.6/38.00	28.11	23.43	19.55	16.76	14.42	12.57	11.09	9.94	9.26 (59.7m)
55		5.9~25.6/25.00	25.00		21.40	17.97	15.46	13.59	12.22	11.46	11.20 (54.7m)
		5.9~10.7/46.00	30.86	25.46	21.02	17.60	15.11	13.26	11.92		
50		5.4~27.2/25.00	25.00		23.23	19.90	17.09	14.86	13.35		13.17 (49.7m)
		5.4~13.3/50.00	35.97	27.97	22.88	19.57	16.75	14.56			
45		5.0~28.5/25.00	25.00		23.83	19.86	16.98	15.00			14.85 (44.7m)
		5.0~14.3/50.00	36.64	28.74	23.48	19.53	16.69				
40		4.5~28.6/25.00	25.00		23.82	20.11	17.66				17.54 (39.7m)
		4.5~14.8/50.00	37.05	28.87	23.51	19.82					
35		4.1~28.8/25.00	25.00		23.88	20.50					20.42 (34.7m)
		4.1~14.8/50.00	36.78	28.78	23.60						
30		3.6~29.0/25.00	25.00		24.20						24.19 (29.7m)
		3.6~16.0/50.00	38.34	29.08							

■ 传动机构 Mechanisms

配置 Configuration			⏏			⏏			kW	
			Ⅲ	Ⅳ	Ⅴ	Ⅲ	Ⅳ	Ⅴ		
 起升 Hoisting	QPL5080	m/min	0~32	0~64	0~80	0~16	0~32	0~40	160	600m ①(6 layers)
		t	25	12.5	6	50	25	12		
 回转 Slewing	HPW75F1.130B×2 HPW75F2.130B×1	r/min	0~0.61						3×7.5	①超出咨询我们 Consult us if overtop
 变幅 Trolleying	BPL900	min	3min(15° ~85°)						90	
	380V(±10%) 50Hz	272.5 kW								

■ 运输单元 Packing list / L630-50

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty	序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	Jib I 臂节 I		9.71	2.50	2.44	2.16	1	6	Jib VI 臂节 VI		5.32	2.45	2.44	0.87	1
2	Jib II 臂节 II		5.32	2.45	2.44	1.05	1	7	Jib VII 臂节 VII		11.12	2.45	3.36	3.01	1
3	Jib III 臂节 III		10.50	2.45	2.66	2.10	1	8	前上撑杆及 头部滑轮组 (A字架) Frontal-up Stay Bar and Pulley Block		9.45	2.24	0.97	4.31	1
4	Jib IV 臂节 IV		10.50	2.45	2.66	1.72	1	9	前下撑杆 (A字架) Frontal-down strut(A-frame)		5.19	0.45	0.36	0.79	2
5	Jib V 臂节 V		10.50	2.45	2.44	1.52	1	10	缓冲器 (A字架) Buffer (A-frame)		4.06	2.63	0.37	0.98	1

■ 运输单元 Packing list / L630-50

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
11	斜撑杆 (A字架) Diagonal Stay		6.20	0.16	0.24	0.22	2
12	后撑杆 (A字架) Back Stay Bar		11.91	0.30	0.52	0.90	2
13	回转塔身 Slewing Mast		2.77	2.50	2.40	2.86	1
14	司机室 Cabin		4.71	1.81	2.37	1.50	1
15	回转总成 Slewing assembly		3.30	2.92	3.08	20.50	1
序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
16	爬升架主弦 Climbing Cage Main chord		12.60	0.60	0.60	1.65	4
17	引进梁 Leading Beam		8.81	1.28	0.46	1.06	1
18	顶升挂板 Climbing Hanged Beam		2.36	0.28	1.23	0.74	1
19	标准节主弦 Tower Section Main Chord		6.00	0.47	0.39	1.10	36
20	变幅机构 Luffing Mechanism		3.67	2.13	1.84	8.59	1

■ 运输单元 Packing list / L630-50

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
21	起升机构 Hoisting Mechanism		4.60	2.75	2.17	16.5	1
22	变幅滑轮组 Luffing Pulley Block		1.50	1.20	1.09	0.53	1
23	变幅拉杆A Luff Rod A		6.41	0.08	0.15	0.09	2
24	变幅拉杆B Luff Rod B		4.97	0.08	0.15	0.08	14
序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
21	平衡臂结构 Counter Jib Structure		10.00	2.87	2.00	13.08	1
22	平衡臂下撑杆 Counter Jib Down Stay Bar		4.54	2.52	0.34	1.70	1
23	吊钩组 Hook		2.49	0.75	1.14	0.93	1