

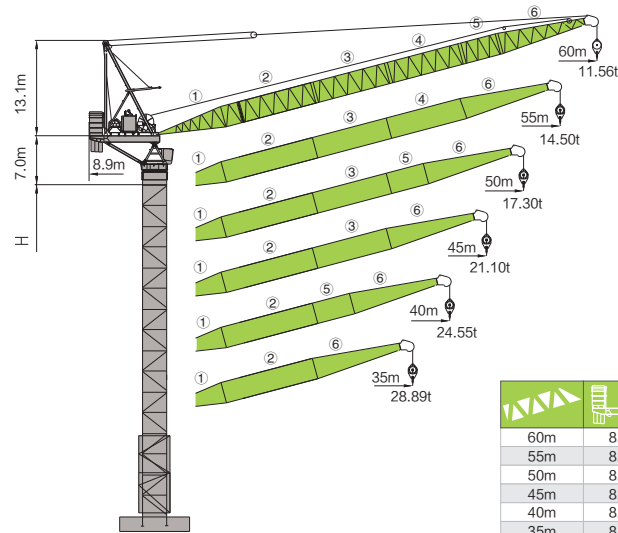




	H	(kg)	PHZ12400	PHZ7000	PHZ3000
60m	8.9m	64200	3	3	2
55m	8.9m	64200	3	3	2
50m	8.9m	64200	3	3	2
45m	8.9m	61200	3	3	1
40m	8.9m	61200	3	3	1
35m	8.9m	58200	3	3	0


塔身 Masts / 反力 Reactions / LH800-63




Internal climbing	
Ho	84-122t
Hv	35-99t
V	59-101t
	10-66t
	395t

- 工作状态反力 Reactions in service
 - 非工作状态反力 Reactions out of service
 - ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重和外爬升系统)
Weight with max free-standing height, max jib (without counter-weight, load and external climbing system)
- 请联系我们 Please consult us

附着 Anchorages / LH800-63

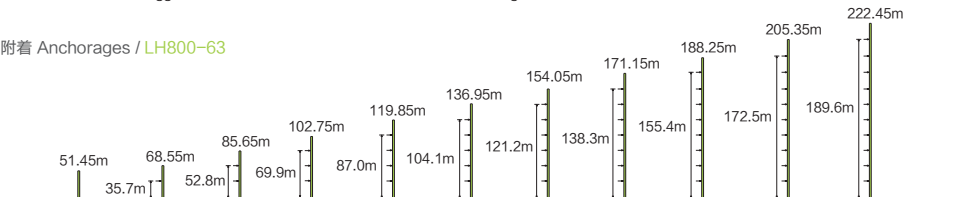

■ 起重臂 Luffing jib

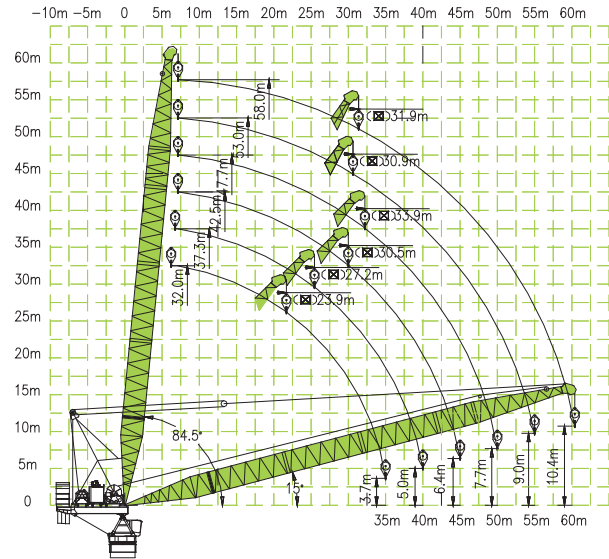

■ 非工作状态最小幅度 Minimum radius out of service
 ⊗ 臂根铰点 Hinge point at jib foot





■ 起重特性 Load diagram

		Max Capacity m/t	18	20	23	25	28	30	33	35	40	45	50	55	60
60	⊙	7.2~25.2/32.00	32.00				30.14	28.8	27.1	25.49	21.54	18.10	15.38	13.22	11.56
	⊗	7.2~9.8/43.50	37.97	36.52	34.13	32.08	29.61	28.29	26.55	24.93	20.99	17.56	14.88	12.76	11.23 (59.8)
55	⊙	6.7~29.3/32.00	32.00					31.91	31.85	30.16	25.61	21.05	17.19	14.50	
	⊗	6.7~9.2/58.50	47.90	44.70	41.04	38.87	35.92	34.33	31.68	29.64	25.07	20.53	16.71	14.21 (54.8)	
50	⊙	6.2~31.1/32.00	32.00						31.56	30.60	25.77	21.34	17.30		
	⊗	6.2~9.3/63.00	49.94	47.52	43.02	40.68	37.92	36.47	32.42	30.09	25.38	20.85	17.06 (49.8)		
45	⊙	5.7~31.2/32.00	32.00						31.42	29.47	24.79	21.10			
	⊗	5.7~13.9/63.00	55.19	52.21	46.13	42.76	37.74	34.94	31.14	29.00	24.34	20.89 (44.7)			
40	⊙	5.2~31.7/32.00	32.00						30.78	28.68	24.55				
	⊗	5.2~15.8/63.00	59.12	54.09	46.75	42.37	37.02	34.07	30.36	28.27	24.32 (39.8)				
35	⊙	4.7~31.6/32.00	32.00						30.68	28.89					
	⊗	4.7~19.8/63.00	63	62.89	52.92	46.92	39.38	35.02	30.32	28.82 (34.7)					

■ 传动机构 Mechanisms

配置 Configuration			Ⅰ			Ⅱ			
			Ⅲ	Ⅳ	Ⅴ	Ⅲ	Ⅳ	Ⅴ	
 起升 Hoisting	QY35130 电液比例调速	m/min	0~40	0~85	0~130	0~20	0~42.5	0~65	790m① (7layers)
		t	32	14	7	63	28	14	
 回转 Slewing	HY90.330 电液比例调速	r/min	0~0.7						①超出咨询我们 Consult us if overtop
 变幅 Trollering	BY1662 电液比例调速	min	2.2 min(15° ~84.5°)						
发动机 Engine	C15	403 kW							

■ 运输单元 Packing list / LH800-63

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	Jib I 臂节 I		11.85	3.08	3.06	3.30	1
2	Jib II 臂节 II		10.60	3.06	3.29	2.32	1
3	Jib III 臂节 III		10.60	3.06	3.29	2.46	1
4	Jib IV 臂节 IV		10.60	3.06	3.06	2.07	1
5	Jib V 臂节 V		5.37	3.06	3.06	1.28	1
6	Jib VI 臂节 VI		13.90	3.06	3.06	3.57	1
7	前上撑杆及头部滑轮组 (A字架) Frontal-up Stay Bar and Pulley Block		9.28	2.64	1.08	4.90	1
8	拉杆 A Drag rod A		5.11	0.08	0.22	0.11	16
9	动滑轮组 Moving Pulley block		1.58	1.00	1.33	0.66	1
10	前下撑杆 (A字架) Frontal-down Stay Bar		5.37	0.40	0.45	2.03	1

■ 运输单元 Packing list / LH800-63

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
11	缓冲器 (A字架) Buffer (A-frame)		4.85	3.14	0.68	1.29	1
12	斜撑杆 (A字架) Diagonal Stay		6.04	0.18	0.30	0.42	2
13	后撑杆 (A字架) Back Stay Bar		11.90	0.62	0.26	1.07	2
14	回转塔身 Slewing Mast		3.15	3.25	2.90	3.72	1
15	司机室 Cabin		2.31	1.58	2.25	1.00	1

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
16	回转总成 Slewing Assembly		3.60	4.29	3.30	32.80	1
17	平衡臂 Counter-Jib		9.65	3.51	1.95	13.31	1
18	平衡臂撑杆 Stay of Counter-Jib		5.51	0.33	0.42	1.21	2
19	吊钩 Hook		1.20	0.76	2.69	1.46	1
20	爬升架主弦 Climbing Cage Main chord		13.36	-	-	2.20	4

■ 运输单元 Packing list / LH800-63

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
21	平衡重 Counter weight		3.36	0.285	1.55	3.00	2
			4.80	0.68	1.63	12.40	3
			2.44	0.52	2.40	7.00	3
22	引进梁 Leading Beam		9.38	2.15	0.42	1.90	1
23	顶升挂板 Climbing Hanged Beam		3.33	0.23	1.26	0.92	2

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
24	标准节N5 Tower Section N5		3.66	0.95	6.00	9.29	9
25	内爬标准节N7 Tower Section N7		3.66	0.95	6.00	9.33	4
26	内爬基节 Base Section		3.66	1.32	6.00	15.52	1