



平衡重		5500 / 4000 / 2500 kg			
		PHZ5500	PHZ4000	PHZ2500	
85m	24.0m	30000	5	0	1
80m	24.0m	30000	5	0	1
75m	24.0m	28500	4	1	1
70m	24.0m	28500	4	1	1
65m	24.0m	27500	5	0	0
60m	24.0m	26000	4	1	0
55m	24.0m	26000	4	1	0
50m	18.0m	37000	6	1	0
45m	18.0m	37000	6	1	0
40m	18.0m	34000	5	1	1
35m	18.0m	30000	5	0	1
30m	18.0m	27500	5	0	0

■ 塔身 Masts / 反力 Reactions / W600-25U



- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- ⊕ 独立高度、最大起重臂的自重 (不含平衡重、吊重)  
Weight with max free-standing, max jib (without counter-weight and load)
- 独立高度最大压重重量
- \* 2.5m × 2.5m × 2.85m 标准节选配  
2.5m × 2.5m × 2.85m Tower section is optional configuration.

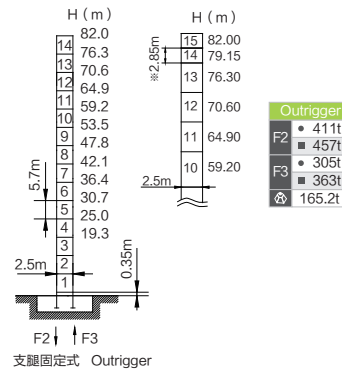

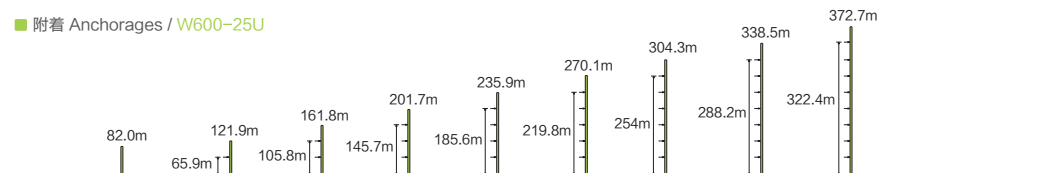


■ 附着 Anchorages / W600-25U



■ 起重特性 Load Diagrams

Max Capacity m/t	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
85 (R=86.9)	4.3~26.4/12.5	12.50	10.72	8.90	7.56	6.52	5.70	5.03	4.48	4.01	3.61	3.27	2.96	2.70	2.70
	4.3~14.1/25.0	23.15	16.20	12.21	9.62	7.81	6.46	5.43	4.60	3.93	3.38	2.91	2.51	2.17	1.87
80 (R=81.9)	4.3~33.3/12.5	12.50	11.80	10.08	8.75	7.70	6.84	6.13	5.54	5.03	4.58	4.20	3.10		
	4.3~17.6/25.0	25.00	21.45	16.34	13.03	10.70	8.98	7.65	6.60	5.75	5.04	4.44	3.93	3.49	3.10
75 (R=76.9)	4.3~36.0/12.5	12.50	11.06	9.62	8.48	7.55	6.78	6.13	5.58	5.10	4.00				
	4.3~19.0/25.0	25.00	23.49	17.95	14.36	11.83	9.96	8.53	7.38	6.46	5.69	5.04	4.48	4.00	
70 (R=71.9)	4.3~39.6/12.5	12.50	12.34	10.76	9.50	8.47	7.63	6.91	6.30						
	4.3~20.8/25.0	25.00	20.06	16.09	13.31	11.25	9.66	8.40	7.38	6.53	5.82	5.20			
65 (R=66.9)	4.3~41.8/12.5	12.50	11.47	10.14	9.06	8.16	7.40								
	4.3~21.9/25.0	25.00	21.38	17.18	14.23	12.05	10.38	9.04	7.96	7.06	6.30				
60 (R=61.9)	4.3~46.2/12.5	12.50	11.40	10.20	9.20										
	4.3~24.1/25.0	25.00	23.97	19.32	16.06	13.64	11.78	10.30	9.10	8.10					
55 (R=56.9)	4.3~48.1/12.5	12.50	11.95	10.70											
	4.3~25.1/25.0	25.00	20.27	16.86	14.34	12.40	10.86	9.60							
50 (R=51.9)	4.3~49.7/12.5	12.50	12.40												
	4.3~25.9/25.0	25.00	21.03	17.51	14.90	12.90	11.30								
45 (R=46.9)	4.3~45.0/12.5	12.50													
	4.3~27.3/25.0	25.00	22.41	18.69	15.93	13.80									
40 (R=41.9)	4.3~40.0/12.5	12.50													
	4.3~27.3/25.0	25.00	22.51	18.77	16.00										
35 (R=36.9)	4.3~35.0/12.5	12.50													
	4.3~27.4/25.0	25.00	22.55	18.80											
30 (R=31.9)	4.3~30.0/12.5	12.50													
	4.3~27.4/25.0	25.00	22.50												

■ 传动机构 Mechanisms

配置 Configuration		bd			b bd			kW		
		III	IV	V	III	IV	V			
 起升 Hoisting	H90FL63-1000	m/min	38	76	90	19	38	45	90	1000m
		t	12.5	6.25	3	25	12.5	6.25		
 回转 Slewing	S75CA-130.146LB14/13A S75CN-130.146LB14/13A	r/min	0~0.72						4×7.5	▲超出咨询我们 Consult us if overtop
 变幅 Trolleying	T110FC85-b	m/min	0~50(25t) 0~100(12.5t)						11.0	Consult us if overtop
	380V(±10%)50Hz	131kW								

■ 运输单元 Packing list / 上装 Upper Parts / W600-25U

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty	序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	平衡臂臂节 I Counter-jib I		8.34	2.53	1.88	7.56	1	10	臂节 VII Jib VII		10.23	1.49	1.88	1.41	1
2	平衡臂臂节 II Counter-jib II		6.26	2.49	1.81	3.47	1	11	臂节 VIII Jib VIII		5.20	1.49	1.86	0.49	2
3	平衡臂臂节 III 结构 Counter-jib III Structure		11.63	1.90	0.88	5.90	1	12	臂节 IX Jib IX		10.18	1.49	1.84	0.82	1
4	臂节 I Jib I		10.38	1.74	2.60	6.26	1	13	臂尖节 Jib end		0.94	1.74	2.47	0.19	1
5	臂节 II Jib II		10.42	1.49	2.51	4.82	1	14	主小车 Trolley		2.34	1.75	1.17	0.51	1
6	臂节 III Jib III		10.39	1.49	2.49	3.64	1	15	副小车 Trolley		2.25	1.75	1.17	0.51	1
7	臂节 IV Jib IV		10.32	1.49	2.47	2.93	1	16	吊钩组 Hook		1.91	0.40	2.36	0.90	1
8	臂节 V Jib V		5.26	1.49	1.94	1.34	1	17	起升机构 Hoisting mechanism		3.24	2.49	1.46	5.11	1
9	臂节 VI Jib VI		10.25	1.49	1.92	1.89	1	18	变幅机构 Trolley mechanism		1.66	0.92	0.81	0.74	1

■ 运输单元 Packing list / 下装 Bottom Parts / W600-25U

序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty	序号 No.	名称 Description	形状 Sketch	长 L(m)	宽 B(m)	高 H(m)	单件重量 Weight per Piece(t)	数量 Qty
1	回转总成 Slewing assemble		6.53	3.28	3.19	13.70	1	6	基节/主弦 Base tower section		6.00	0.43	0.49	1.14	4 × 1
2	引进系统 Mounting device		8.19	0.71	0.64	1.58	1	7	爬升架结构 Climbing frame Structure		11.43	3.40	3.23	6.63	1
3	过渡节 Transition section		4.05	3.23	3.23	4.52	1								
4	标准节/主弦 Tower section		6.00	0.43	0.48	0.89	4 × 11								
5	加强节/主弦 Reinforced tower section		6.00	0.43	0.49	1.14	4 × 2								