



| 平衡重 | | 5500 / 4000 / 2500 kg | | | |
|------|-------|-----------------------|---------|---------|---|
| 塔身高度 | 塔身宽度 | PHZ5500 | PHZ4000 | PHZ2500 | |
| 80m | 27.3m | 35500 | 6 | 0 | 1 |
| 75m | 27.3m | 34000 | 5 | 1 | 1 |
| 70m | 27.3m | 33000 | 6 | 0 | 0 |
| 65m | 27.3m | 33000 | 6 | 0 | 0 |
| 60m | 27.3m | 30000 | 5 | 0 | 1 |
| 55m | 27.3m | 28500 | 4 | 1 | 1 |
| 50m | 27.3m | 26000 | 4 | 1 | 0 |
| 45m | 21.3m | 35500 | 6 | 0 | 1 |
| 40m | 21.3m | 33000 | 6 | 0 | 0 |
| 35m | 21.3m | 27500 | 5 | 0 | 0 |
| 30m | 21.3m | 24500 | 4 | 0 | 1 |

塔身 Masts / 反力 Reactions / W750-40W

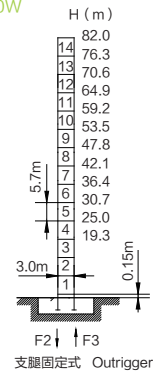


| Outrigger | |
|-----------|--------|
| F2 | ● 416t |
| | ■ 379t |
| F3 | ● 286t |
| | ■ 266t |
| | ⊗ 197t |

- 工作状态反力 Reactions in service
- 非工作状态反力 Reactions out of service
- ⊗ 独立高度、最大起重臂的自重 (不含平衡重、吊重)
Weight with max free-standing, max jib
(without counter-weight and load)

■ 独立高度最大压重量

※ 3.0m × 3.0m × 2.85m 标准节选配
3.0m × 3.0m × 2.85m Tower section is optional configuration.


附着 Anchorages / W750-40W

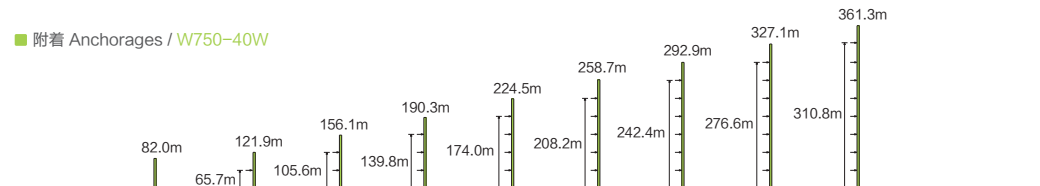

■ 起重特性 Load Diagrams

| Max Capacity m/t | 10.0 | 15.0 | 20.0 | 25.0 | 30.0 | 35.0 | 40.0 | 45.0 | 50.0 | 55.0 | 60.0 | 65.0 | 70.0 | 75.0 | 80.0 | |
|---------------------|---------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|---------------------|
| | | | | | | | | | | | | | | | | Max Capacity m/t |
| 80 (R=82.9) | 5.2~33.9/20.0 | | 20.00 | | | | 19.28 | 16.49 | 14.34 | 12.64 | 11.26 | 10.11 | 9.15 | 8.33 | 7.62 | 7.00 |
| | 5.2~18.0/40.0 | 40.00 | 35.26 | 26.86 | 21.44 | 17.65 | 14.86 | 12.71 | 11.01 | 9.63 | 8.49 | 7.52 | 6.70 | 5.99 | 5.37 | |
| 75 (R=77.9) | 5.2~35.2/20.0 | | 20.00 | | | | 17.22 | 14.99 | 13.22 | 11.78 | 10.59 | 9.59 | 8.74 | 8.00 | | |
| | 5.2~18.7/40.0 | 40.00 | 36.80 | 28.06 | 22.43 | 18.50 | 15.59 | 13.36 | 11.59 | 10.15 | 8.97 | 7.96 | 7.11 | 6.37 | | |
| 70 (R=72.9) | 5.2~36.9/20.0 | | 20.00 | | | | 18.22 | 15.87 | 14.01 | 12.50 | 11.25 | 10.20 | 9.30 | | | |
| | 5.2~19.5/40.0 | 40.00 | 38.91 | 29.72 | 23.79 | 19.65 | 16.60 | 14.25 | 12.39 | 10.88 | 9.62 | 8.57 | 7.67 | | | |
| 65 (R=67.9) | 5.2~37.8/20.0 | | 20.00 | | | | 18.72 | 16.32 | 14.41 | 12.86 | 11.58 | 10.50 | | | | |
| | 5.2~20.0/40.0 | 40.00 | 39.96 | 30.54 | 24.47 | 20.23 | 17.09 | 14.69 | 12.78 | 11.23 | 9.95 | 8.87 | | | | |
| 60 (R=62.9) | 5.2~39.2/20.0 | | 20.00 | | | | 19.52 | 17.02 | 15.04 | 13.43 | 12.10 | | | | | |
| | 5.2~20.7/40.0 | 40.00 | | 31.85 | 25.54 | 21.14 | 17.89 | 15.39 | 13.41 | 11.80 | 10.47 | | | | | |
| 55 (R=57.9) | 5.2~39.8/20.0 | | 20.00 | | | | 19.89 | 17.35 | 15.34 | 13.70 | | | | | | |
| | 5.2~21.0/40.0 | 40.00 | | 32.47 | 26.05 | 21.57 | 18.26 | 15.72 | 13.71 | 12.07 | | | | | | |
| 50 (R=52.9) | 5.2~40.2/20.0 | | 20.00 | | | | 17.53 | 15.50 | | | | | | | | |
| | 5.2~21.2/40.0 | 40.00 | | 32.81 | 26.33 | 21.81 | 18.47 | 15.91 | 13.87 | | | | | | | |
| 45 (R=47.9) | 5.2~40.1/20.0 | | 20.00 | | | | 17.60 | | | | | | | | | |
| | 5.2~21.2/40.0 | 40.00 | | 32.93 | 26.44 | 21.90 | 18.55 | 15.97 | | | | | | | | |
| 40 (R=42.9) | 5.2~40.0/20.0 | | 20.00 | | | | | | | | | | | | | |
| | 5.2~21.2/40.0 | 40.00 | | 33.03 | 26.51 | 21.96 | 18.60 | | | | | | | | | |
| 35 (R=37.9) | 5.2~35.0/20.0 | | 20.00 | | | | | | | | | | | | | |
| | 5.2~21.3/40.0 | 40.00 | | 33.09 | 26.56 | 22.00 | | | | | | | | | | |
| 30 (R=32.9) | 5.2~30.0/20.0 | | 20.00 | | | | | | | | | | | | | |
| | 5.2~21.3/40.0 | 40.00 | | 33.14 | 26.60 | | | | | | | | | | | |

■ 传动机构 Mechanisms

| 配置 Configuration | m/min | bd | | | | b'bd | | | | kW |  |
|---|---------|------------------------|-----|-----|-----|------|-----|----|----|-------|---|
| | | II | III | IV | V | II | III | IV | V | | |
| 起升 Hoisting H110FL100-930D | m/min | 34 | 68 | 102 | 136 | 17 | 34 | 51 | 68 | 110 | 930m(6 layers) |
| | t | 20 | 10 | 5 | 2.5 | 40 | 20 | 10 | 5 | | |
| 回转 Slewing S75CA-130.146 LB14/13A S75CN-130.146 LB14/13A | r/min | 0~0.64 | | | | | | | | 4×7.5 | ▲超出咨询我们 Consult us if overtop |
| 变幅 Trolleying T185FC85-b | m/min | 0~35(40t) 0~70(20t) | | | | | | | | 18.5 | |
| 380V(±10%)50Hz | 158.5kW | | | | | | | | | | |

■ 运输单元 Packing list / 上装 Upper Parts / W750-40W

| 序号 No. | 名称 Description | 形状 Sketch | 长 L(m) | 宽 B(m) | 高 H(m) | 单件重量 Weight per Piece(t) | 数量 Qty | 序号 No. | 名称 Description | 形状 Sketch | 长 L(m) | 宽 B(m) | 高 H(m) | 单件重量 Weight per Piece(t) | 数量 Qty |
|-----------|---|--------------|-----------|-----------|-----------|--------------------------------|-----------|-----------|--|--------------|-----------|-----------|-----------|--------------------------------|-----------|
| 1 | 平衡臂臂节 I Counter-jib I | | 11.97 | 2.53 | 1.90 | 11.23 | 1 | 10 | 臂节 VII Jib VII | | 10.25 | 1.49 | 1.92 | 1.78 | 1 |
| 2 | 平衡臂臂节 II Counter-jib II | | 8.26 | 2.49 | 1.81 | 3.67 | 1 | 11 | 臂节 VIII Jib VIII | | 10.24 | 1.49 | 1.87 | 1.15 | 1 |
| 3 | 平衡臂臂节 III 结构 Counter-jib III Structure | | 11.63 | 2.08 | 0.88 | 6.82 | 1 | 12 | 臂节 IX Jib IX | | 5.22 | 1.49 | 1.86 | 0.48 | 1 |
| 4 | 臂节 I Jib I | | 10.38 | 1.74 | 2.65 | 7.80 | 1 | 13 | 臂尖节 Jib end | | 1.08 | 1.74 | 2.57 | 0.21 | 1 |
| 5 | 臂节 II Jib II | | 10.28 | 1.49 | 2.52 | 6.30 | 1 | 14 | 主小车 Trolley | | 2.40 | 1.64 | 1.35 | 0.76 | 1 |
| 6 | 臂节 III Jib III | | 10.42 | 1.49 | 2.48 | 4.62 | 1 | 15 | 副小车 Trolley | | 2.40 | 1.82 | 1.35 | 0.68 | 1 |
| 7 | 臂节 IV Jib IV | | 10.39 | 1.49 | 2.35 | 3.64 | 1 | 16 | 吊钩组 Hook | | 2.20 | 0.40 | 2.48 | 1.28 | 1 |
| 8 | 臂节 V Jib V | | 10.32 | 1.49 | 2.46 | 2.93 | 1 | 17 | 起升机构 (不含钢丝绳) Hoisting mechanism | | 3.52 | 2.68 | 1.85 | 7.45 | 1 |
| 9 | 臂节 VI Jib VI | | 5.26 | 1.49 | 1.94 | 1.34 | 1 | 18 | 变幅机构 Trolley mechanism | | 2.08 | 0.98 | 1.05 | 1.72 | 1 |

■ 运输单元 Packing list / 下装 Bottom Parts / W750-40W

| 序号 No. | 名称 Description | 形状 Sketch | 长 L(m) | 宽 B(m) | 高 H(m) | 单件重量 Weight per Piece(t) | 数量 Qty | 序号 No. | 名称 Description | 形状 Sketch | 长 L(m) | 宽 B(m) | 高 H(m) | 单件重量 Weight per Piece(t) | 数量 Qty |
|-----------|--|--------------|-----------|-----------|-----------|--------------------------------|-----------|-----------|---|--------------|-----------|-----------|-----------|--------------------------------|-----------|
| 1 | 回转总成 Slewing assemble | | 6.99 | 3.22 | 3.20 | 16.86 | 1 | 6 | 基节/主弦 Base tower section | | 6.00 | 0.42 | 0.49 | 1.08 | 4 |
| 2 | 引进系统 Mounting device | | 9.10 | 0.71 | 0.93 | 1.67 | 1 | | | | | | | | |
| 3 | 过渡节 Transition section | | 3.79 | 3.67 | 4.05 | 6.29 | 1 | 7 | 爬升架 前半结构 Climbing frame Front-half -Structure | | 11.46 | 1.87 | 3.79 | 4.27 | 1 |
| 4 | 标准节/主弦 Tower section | | 6.00 | 0.42 | 0.48 | 0.89 | 40 | | | | | | | | |
| 5 | 加强节/主弦 Reinforced tower section | | 6.00 | 0.42 | 0.49 | 1.08 | 12 | 8 | 爬升架 后半结构 Climbing frame Second-half -Structure | | 11.46 | 2.16 | 3.79 | 5.45 | 1 |