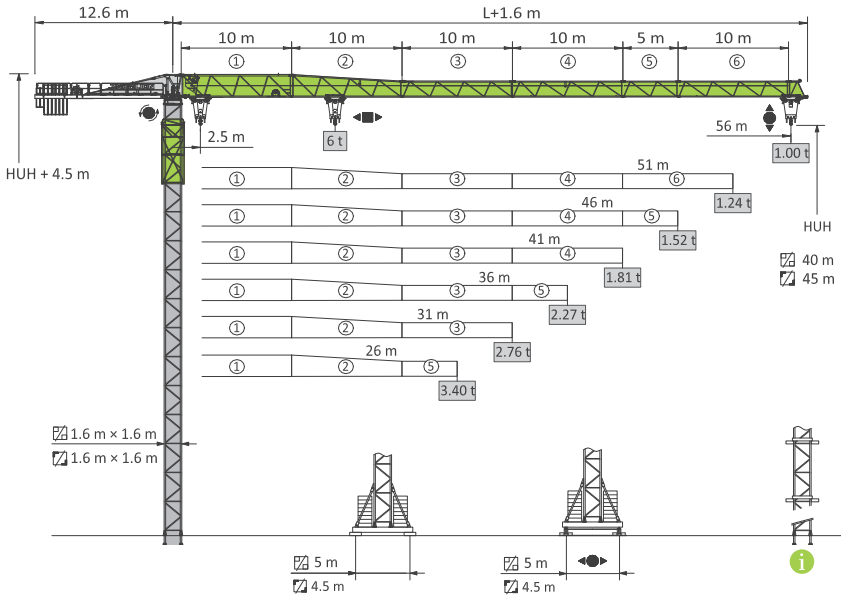
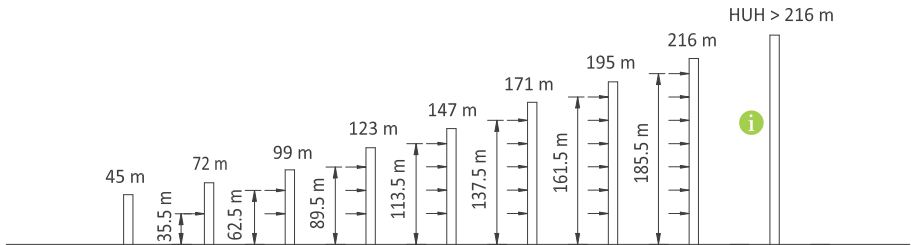
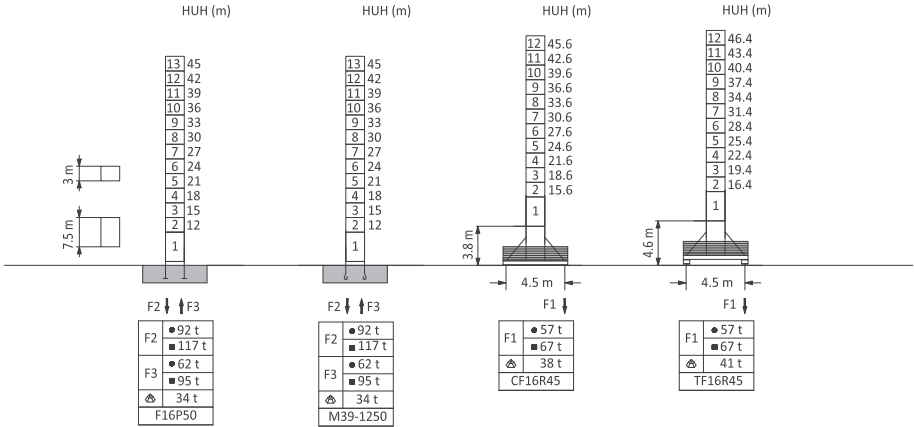


WA5610-6



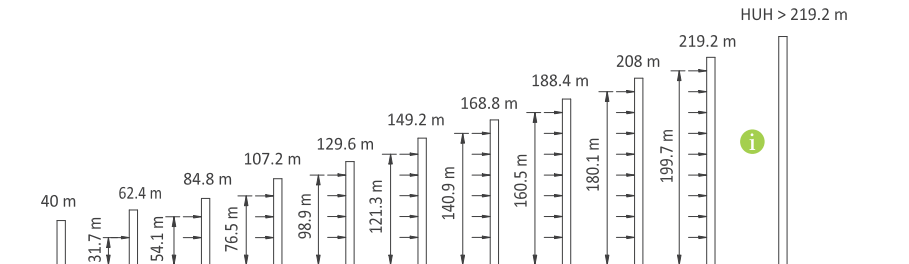
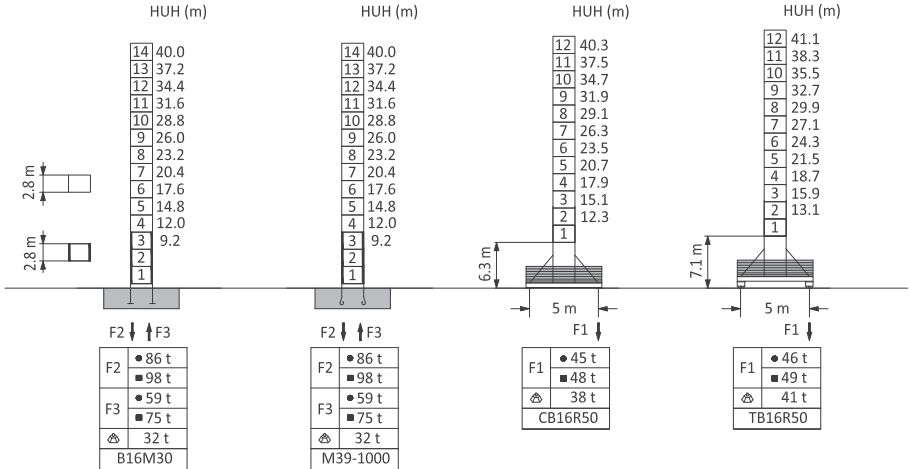
塔身—反力&附着 / Mast – Reactions & Anchorages / Torre – Reação & Fixação /
Tramos– Reacciones y Arriostramientos

 1.6m – L46 WA5610-6F



塔身-反力&附着 / Mast – Reactions & Anchorages / Torre – Reação & Fixação / Tramos- Reacciones y Arriostramientos

 1.6m – E2 WA5610-6A 



起重性能 / Load diagrams / Tabela de Carga / Diagrama de carga



lifting capacity

吊钩间距 m		m / t	16.0	18.0	21.0	23.0	26.0	28.0	31.0	33.0	36.0	38.0	41.0	43.0	46.0	48.0	51.0	53.0	56.0
56.0	吊钩	2.5-25.5/3.0	3.00	3.00	3.00	3.00	2.93	2.67	2.34	2.16	1.92	1.78	1.61	1.50	1.36	1.28	1.16	1.09	1.00
	吊钩	2.5-14.2/6.0	5.21	4.52	3.75	3.35	2.88	2.61	2.29	2.10	1.87	1.73	1.55	1.45	1.30	1.22	1.11	1.04	0.95
51.0	吊钩	2.5-26.6/3.0	3.00	3.00	3.00	3.00	3.00	2.81	2.47	2.28	2.03	1.89	1.70	1.59	1.45	1.36	1.24		
	吊钩	2.5-14.8/6.0	5.46	4.75	3.95	3.53	3.03	2.76	2.42	2.23	1.98	1.84	1.65	1.54	1.39	1.30	1.19		
46.0	吊钩	2.5-27.5/3.0	3.00	3.00	3.00	3.00	3.00	2.94	2.58	2.38	2.13	1.98	1.79	1.67	1.52				
	吊钩	2.5-15.3/6.0	5.68	4.95	4.11	3.68	3.16	2.88	2.53	2.33	2.07	1.93	1.73	1.62	1.47				
41.0	吊钩	2.5-27.8/3.0	3.00	3.00	3.00	3.00	3.00	2.97	2.61	2.41	2.16	2.01	1.81						
	吊钩	2.5-15.4/6.0	5.75	5.00	4.16	3.73	3.20	2.92	2.56	2.36	2.10	1.95	1.76						
36.0	吊钩	2.5-28.9/3.0	3.00	3.00	3.00	3.00	3.00	3.00	2.75	2.54	2.27								
	吊钩	2.5-16.0/6.0	6.00	5.24	4.36	3.91	3.36	3.07	2.69	2.48	2.22								
31.0	吊钩	2.5-29.0/3.0	3.00	3.00	3.00	3.00	3.00	3.00	2.76										
	吊钩	2.5-16.1/6.0	6.00	5.26	4.38	3.92	3.38	3.08	2.71										
26.0	吊钩	2.5-26.0/3.0	3.00	3.00	3.00	3.00	3.00												
	吊钩	2.5-16.2/6.0	6.00	5.29	4.40	3.95	3.40												

传动机构 / Mechanisms / Mecanismo de transmissão / Mecanismos

380 V (± 10 %) 50 Hz		吊钩		吊钩		kW	吊钩	
吊钩	H25FC15-440	t	0.8	3	1.6	6	25	440 m
		m/min	100	40	50	20		
吊钩	S75C6A-150LB12/16A	r/min	0 - 0.8				7.5	
吊钩	T30FC60-b(D)	m/min	0 - 100				3.0	
吊钩	ZA52-D B52-D	m/min	0 - 25				2×5.2	
吊钩		35.5 kW + 2×5.2 kW						















平衡重 / Counter-jib ballast / Contrapeso / Contrapeso

高度 (m)	2.0t	1.3t	重量 (t)	PHZ2000Q	PHZ1300N
56.0	4	4	13.2	 <p>(mm)</p>	 <p>(mm)</p>
51.0	4	3	11.9		
46.0	4	2	10.6		
41.0	3	3	9.9		
36.0	3	2	8.6		
31.0	4	0	8.0		
26.0	2	2	6.6		










压重 / Base ballast / Lastro / Lastre basal

 1.6m - L46	CF16R45	HUH (m)	15.6	18.6	21.6	24.6	27.6	30.6	33.6	36.6	39.6	42.6	45.6
	TF16R45	HUH (m)	16.4	19.4	22.4	25.4	28.4	31.4	34.4	37.4	40.4	43.4	46.4
		重量 (t)	39.4	39.4	39.4	48.4	48.4	48.4	57.4	57.4	66.4	75.4	75.4














运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

上装 / Slewing crane part / Peça de guindaste giratório/Pieza de grúa giratoria		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Contra Lança Braço de equilíbrio		11.83	1.24	0.58	2535	
起重臂节 Jib section Juntas da lança Pluma Contrapeso		① 10.29 ② 10.19 ③ 10.17 ④ 10.16 ⑤ 10.14	0.98	2.35 2.23 1.58 1.58 1.58	1280 850 680 580 500	
		⑥ 5.15	0.98	1.58	280	
		⑦ 1.84	0.98	1.58	135	
载重小车 Trolley Carros de deslocamento Carro		2.03	1.67	0.90	280	
吊钩 Pulley block Gancho Gancho		0.93	0.36	1.54	280	
司机室 Cabin Cabine de operação Cabina		2.08	1.30	2.16	480	
起升机构 Hoisting mechanism Mecanismo de elevação Mecanismo de izaje		H25FC15-440	1.78	1.05	0.81	920
变幅机构 Trolleying mechanism Mecanismo de angulação Mecanismo de carro		T30FC60-b(D)	1.01	0.73	0.57	350
回转总成※ Slewing assembly Montagem giratória Conjunto de giro		 1.6 m	1.76	1.83	2.96	3200
回转总成 Slewing assembly Montagem giratória Conjunto de giro		 1.6 m	1.76	1.83	1.96	3000
塔头 Tower head Turmspitze		 1.6 m	1.71	1.60	2.04	880

运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

塔身 / Crane tower / Corpo da torre/Tramo		L (m)	B (m)	H (m)	kg (±5%)	
过渡节 Transition section Seções de transição Sección de transición		☒ 1.6 m - S16A5	2.00	2.08	2.14	820
爬升架 Climbing tower section Quadro de escalada Jaula de telescopaje		☒ 1.6 m - TC16P40	6.02	2.08	2.38	2690
标准节 Tower section Secção padrão Sección de torre		☒ 1.6 m - E2C	2.80	1.74	1.79	780
		☒ 1.6 m - EQ7C	2.80	1.74	1.79	910
		☒ 1.6 m - EQ8B	2.80	1.74	1.79	880
		☒ 1.6 m - EQ9B	2.83	1.92	1.92	1020
支腿 Fixing angles Chumbadores Empotramiento		B16M30	1.25	0.3	0.3	4×105
底座基础节 Basic mast unit Secção base do quadro base Sección base para chasis		CB16R50 / TB16R50	2.80	1.74	1.74	885
		CB16R50 / TB16R50	2.80	2.03	2.03	1010
撑杆 Border support Escoras Apoyo fronterizo		CB16R50 / TB16R50	4.60	0.24	0.24	4×290
整梁 Main beam Viga principal Te principal		CB16R50 / TB16R50	7.65	1.00	0.85	1300
半梁 Half beam Meia viga Media viga		CB16R50 / TB16R50	3.65	0.51	0.79	2×800

运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

塔身 / Crane tower / O corpo da torre / Tramo		L (m)	B (m)	H (m)	kg (±5%)	
过渡节 Transition section Seções de transição Sección de transición		 1.6 m - L46B5	2.45	2.17	2.17	1280
爬升架 Climbing tower section Quadro de escalada Jaula de telescopaje		 1.6 m - TC16P50	7.00	2.08	2.25	2865
标准节 Tower section Secção padrão Sección de torre		 1.6 m - L46G20A-C	7.70	2.10	2.00	2725
标准节 (4片) Tower section (4 pieces) Secção padrão (4 comprimidos) Sección de torre (4 piezas)		 1.6 m - L46A5-C	3.30	0.6	1.67	1170
支腿 Fixing angles Outriggers Empotramiento		F16P50	1.12	0.49	0.49	4x170
底架基础节 Basic mast unit Secção base do quadro base Sección base para chasis		CF16R45 / TF16R45	3.25	2.00	2.00	1750
撑杆 Border support Escoras Apoyo fronterizo		CF16R45 / TF16R45	3.51	0.19	0.25	4x190
整梁 Main beam Viga principal Te principal		CF16R45 / TF16R45	6.85	1.00	1.19	1370
半梁 Half beam Meia viga Media viga		CF16R45 / TF16R45	3.30	0.61	1.16	2x675