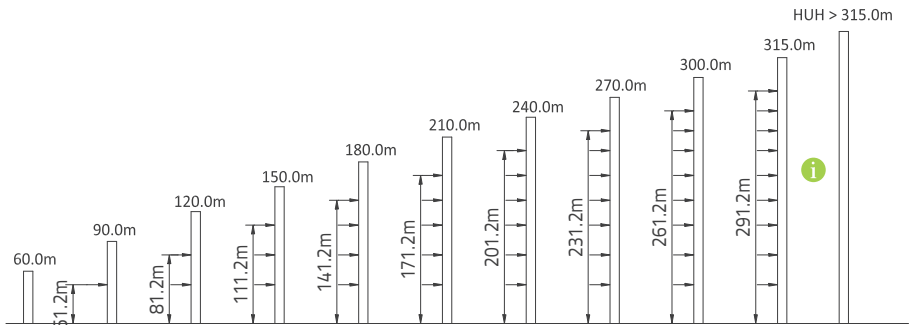
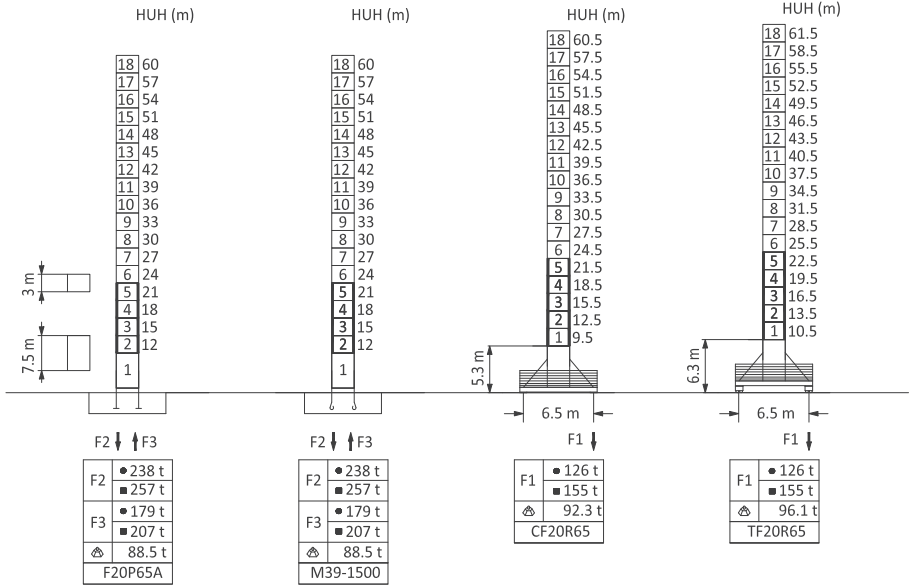


塔身—反力&附着 / Mast – Reactions & Anchorages / Torre – Reação & Fixação / Tramos— Reacciones y Arriostramientos

2.0m –L68B WA7527-20D










起重性能 / Load diagrams / Tabela de Carga / Diagrama de carga




b_d—b_{bd}

吊钩间距 m		m / t	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0
75.0	b _d	5.2-25.8/10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.3	8.4	7.0	6.0	5.2	4.6	4.1	3.6	3.3	3.0	2.7
	b _{bd}	4.2-13.7/20.0	20.0	18.0	14.9	12.7	11.0	9.7	8.6	7.7	6.3	5.3	4.5	3.9	3.4	2.9	2.6	2.3	2.0
70.0	b _d	5.2-27.9/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.2	7.7	6.6	5.7	5.0	4.5	4.0	3.6	3.3	
	b _{bd}	4.2-14.8/20.0	20.0	19.6	16.4	14.0	12.1	10.7	9.5	8.5	7.0	5.9	5.0	4.3	3.8	3.3	2.9	2.6	
65.0	b _d	5.2-29.5/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.8	8.2	7.0	6.1	5.4	4.8	4.3	3.9		
	b _{bd}	4.2-15.6/20.0	20.0	20.0	17.4	14.9	12.9	11.4	10.1	9.1	7.5	6.3	5.4	4.7	4.1	3.6	3.2		
60.0	b _d	5.2-30.5/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	8.5	7.3	6.4	5.6	5.0	4.5			
	b _{bd}	4.2-16.1/20.0	20.0	20.0	18.1	15.4	13.4	11.8	10.6	9.5	7.8	6.6	5.7	4.9	4.3	3.8			
55.0	b _d	5.2-31.5/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	8.8	7.6	6.6	5.8	5.2				
	b _{bd}	4.2-16.5/20.0	20.0	20.0	18.7	16.0	13.9	12.3	10.9	9.9	8.1	6.9	5.9	5.1	4.5				
50.0	b _d	5.2-33.5/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.5	8.2	7.1	6.3					
	b _{bd}	4.2-17.6/20.0	20.0	20.0	20.0	17.2	15.0	13.2	11.8	10.6	8.8	7.5	6.4	5.6					
45.0	b _d	5.2-33.4/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.5	8.1	7.1						
	b _{bd}	4.2-17.5/20.0	20.0	20.0	20.0	17.2	14.9	13.2	11.8	10.6	8.8	7.4	6.4						
40.0	b _d	5.2-34.0/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.7	8.3							
	b _{bd}	4.2-17.8/20.0	20.0	20.0	20.0	17.5	15.2	13.5	12.0	10.8	9.0	7.6							
35.0	b _d	5.2-34.4/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	9.8							
	b _{bd}	4.2-18.0/20.0	20.0	20.0	20.0	17.7	15.4	13.6	12.2	11.0	9.1								
30.0	b _d	5.2-30.0/10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0									
	b _{bd}	4.2-18.1/20.0	20.0	20.0	20.0	17.8	15.5	13.7	12.2	11.0									


传动机构 / Mechanisms / Mecanismo de transmissão / Mecanismos

380 V [± 10 %] 50 Hz		b _d			b _{bd}			kW		
	H75FC50-880	t	2	4	8	4	8	16	75.0	880 m 
		m/min	95	76	38	47	38	19		
	S75CA-130LB14/12A S75CA-130LB14/12A (M)	r/min	0 - 0.8						2×7.5	
	T75FC80-b(D)	m/min	0 - 88						7.5	
	ZAH52A-D ZDH52A-D	m/min	0 - 25						4×5.2	
			97.5 kW + 4×5.2 kW							













平衡重 / Counter-jib ballast / Contrapeso / Contrapeso

▲▲▲▲ m	▲▲▲▲ m	3.9 t	3.0 t	2.0 t	☐(t)	PHZ3900A	PHZ3000S	PHZ2000R
75.0	19.1	4	1	1	20.6	 (mm)	 (mm)	 (mm)
70.0		4	1	0	18.6			
65.0		4	0	1	17.6			
60.0		3	1	1	16.7			
55.0		3	1	1	16.7			
50.0	16.5	4	1	1	20.6			
45.0		4	0	1	17.6			
40.0		3	1	1	16.7			
35.0		3	1	0	14.7			
30.0		3	0	1	13.7			










压重 / Base ballast / Lastro / Lastre basal

 2.0m - L68B	CF20R65	HUH (m)	30.5	33.5	36.5	39.5	42.5	45.5	48.5	51.5	54.5	57.5	60.5
	TF20R65	HUH (m)	31.5	34.5	37.5	40.5	43.5	46.5	49.5	52.5	55.5	58.5	61.5
		☐(t)		56.4	56.4	56.4	80.0	80.0	80.0	80.0	115.4	115.4	115.4











运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

上装 / Slewing crane part / Peça de guindaste giratório/Pieza de grúa giratoria		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Contra Lança Braço de equilíbrio		6.83	1.64	2.51	3560	
		2.70	1.71	0.63	760	
		11.46	1.71	0.85	3240	
起重臂节 Jib section Juntas da lança Pluma Contrapeso		①	10.32	1.40	2.46	2870
		②	10.27	1.40	2.39	1970
		③	10.25	1.40	2.18	1670
		④	10.24	1.40	2.37	1320
		⑤	10.21	1.40	1.87	1090
		⑥	10.21	1.40	1.85	740
		⑦	5.20	1.40	1.85	380
		⑧	5.21	1.40	1.84	340
		⑨	5.21	1.40	1.84	340
		⑩	0.97	1.40	1.84	160
载重小车 Trolley Carros de deslocamento Carro		2.04	1.71	1.01	680	
吊钩 Pulley block Gancho Gancho		1.80	2.00	0.60	600	
司机室 Cabin Cabine de operação Cabina		2.08	1.30	2.16	480	
起升机构 Hoisting mechanism Mecanismo de elevação Mecanismo de izaje		H75FC50-880	2.92	1.52	1.14	2460
变幅机构 Trolleying mechanism Mecanismo de angulação Mecanismo de carro		T75FC80-b(D)	1.44	0.88	0.67	420
回转总成 Slewing assembly Montagem giratória Conjunto de giro		2.0 m	2.22	2.42	1.96	6080

运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

塔身 / Crane tower / Corpo da torre / Tramo		L (m)	B (m)	H (m)	kg (±5%)	
过渡节 Transition section Seções de transição Sección de transición		☑ 2.0 m – L68C3B	2.27	2.61	2.53	1570
爬升架 Climbing tower section Quadro de escalada Jaula de telescopaje		☑ 2.0 m – TC20P51	7.21	2.54	2.54	3820
标准节 (4片) Tower section (4 pieces) Secção padrão (4 comprimidos) Sección de torre (4 piezas)		☑ 2.0 m – L68B6A ☑ 2.0 m – L68B7A ☑ 2.0 m – L68B8A	3.5	2.8	2.12	1460
标准节 Tower section Secção padrão Sección de torre		☑ 2.0 m – L68G22C	7.81	2.10	2.11	4430
支腿 Fixing angles Chumbadores Empotramiento		F20P65A	1.19	0.45	0.45	4×200
底架基础节 Basic mast unit Secção base do quadro base Sección base para chasis		CF20R65 / TF20R65	4.81	2.38	2.38	4910
撑杆 Border support Escoras Apoio fronterizo		CF20R65 / TF20R65	5.31	0.19	0.39	4×520
整梁 Main beam Viga principal Te principal		CF20R65 / TF20R65	9.74	1.39	1.11	2950
半梁 Half beam Meia viga Media viga		CF20R65 / TF20R65	4.69	1.39	1.11	2×1430

运输单元 / Dimensions and weight / Unidades de transporte / Unidad de transporte

塔身 / Crane tower / O corpo da torre / Tramo		L (m)	B (m)	H (m)	kg (±5%)	
过渡节 Transition section Seções de transição Sección de transición		☑ 2.0 m – L68C3C	2.27	2.61	2.53	1571
爬升架 Climbing tower section Quadro de escalada Jaula de telescopaje		☑ 2.0 m – TC20P50U	7.23	3.36	1.27	1350
		☑ 2.0 m – TC20P50U	7.23	3.36	1.52	1810
标准节 (4片) Tower section (4 pieces) Secção padrão (4 comprimidos) Sección de torre (4 piezas)		☑ 2.0 m – L68B6A-C	3.5	2.8	2.12	13×1455
		☑ 2.0 m – L68B7A-C	3.5	2.8	2.12	1×1768
		☑ 2.0 m – L68B8A-C	3.5	2.8	2.12	3×1805
标准节 Tower section Secção padrão Sección de torre		☑ 2.0 m – L68G22C-C	7.81	7.81	2.11	1×4430
支腿 Fixing angles Outriggers Empotramiento		F20P65A	1.19	1.19	0.45	4×199
底座基础节 Basic mast unit Secção base do quadro base Sección base para chasis		CF20R65 / TF20R65	4.81	4.81	2.38	4905
撑杆 Border support Escoras Apoyo fronterizo		CF20R65 / TF20R65	5.31	5.31	0.39	4×522
整梁 Main beam Viga principal Te principal		CF20R65 / TF20R65	9.74	9.74	1.11	2950
半梁 Half beam Meia viga Media viga		CF20R65 / TF20R65	4.69	4.69	1.11	2×1433

